

Before *ultraflo*<sup>®</sup> hemihydrate liquid floor screed is poured the building should be weather tight, roof on, with all doors and windows installed. Any openings, which are not closed up, should be made weather proof with polythene.

## SUB-FLOOR PREPARATION

- Scrape off any debris or mortar splashes from the sub-floor.



- Brush the sub-floor, leaving a flat clean surface, on which to place the insulation.



## INSTALLING INSULATION

- Place the insulation in 2 layers. Place the first layer between any service pipes on the sub-floor, ensuring it is laid flat.



- Fill any voids around the pipes, with dried sand and level off, then place the 2<sup>nd</sup> layer of insulation over the 1<sup>st</sup> layer, ensuring it remains flat, with no rocking.



## INSTALLING EDGE STRIP AND PLASTIC MEMBRANE

- Install the edging strip around all walls, taking care to ensure it is neatly placed into all corners at 90 degrees. Tack the edging strip to the walls using a staple gun as required to hold it in place.



- Place 500 gauge plastic over the top of the insulation ensuring it is pulled tight with no creases. Lap joints a minimum of 100mm and tape joints. Tape the 500 gauge membrane to the plastic skirt of the edging strip.



### INSTALLING UNDERFLOOR HEATING PIPES

- i. Install the underfloor heating pipes, ensuring they are fixed down every 400mm along the length of the pipes more frequently on bends.




- ii. Fill the underfloor heating pipes with water.



### EXPANSION JOINTS AND FINAL CHECK

- i. Install expansion joints across doorways and where the aspect ratio is greater than 1:6 (for further advice contact Technical). Cut away notches on the underside of the joints to allow it to sit level over the UFH pipes.

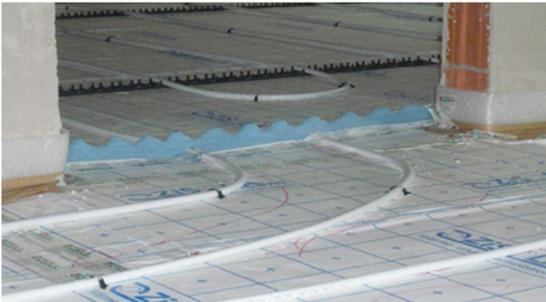

- ii. Complete a final depth check to ensure there is at least 25mm cover over all pipes, paying particular attention to the corners of rooms.
- iii. Brush or vacuum out all debris from the surface of the plastic. Any material left will float once the screed is poured and this will result in blemishes on the surface once the screed has hardened. Inspect the whole tanking system for any tears or untapped joints, make good ready for screed to be poured.

### POURING OF THE SCREED

Only approved contractors can lay *ultraflo*<sup>®</sup>. The contractor will arrive on site, set up the pump, check levels and agree a datum level with you. Once the mixer truck arrives with the screed the layers will commence pumping the screed. Six cubic metres of *ultraflo* can be pumped in approx 30 minutes. The screed is then dapped in two directions to level the surface and then left to dry.

### PROTECTION FOLLOWING INSTALLATION

- i. Immediately after application and until the screed has hardened, keep windows and doors closed for 24hours to protect the surface from frost, direct sunlight, draughts and water ingress.
- ii. Refer to the *ultraflo*<sup>®</sup> Aftercare Guide for information on drying, priming and floor coverings etc.